




ELEVATED WORK PLATFORM HIRE

# SPECIFICATION SHEET

## SCISSOR LIFT

8m/19ft ELECTRIC

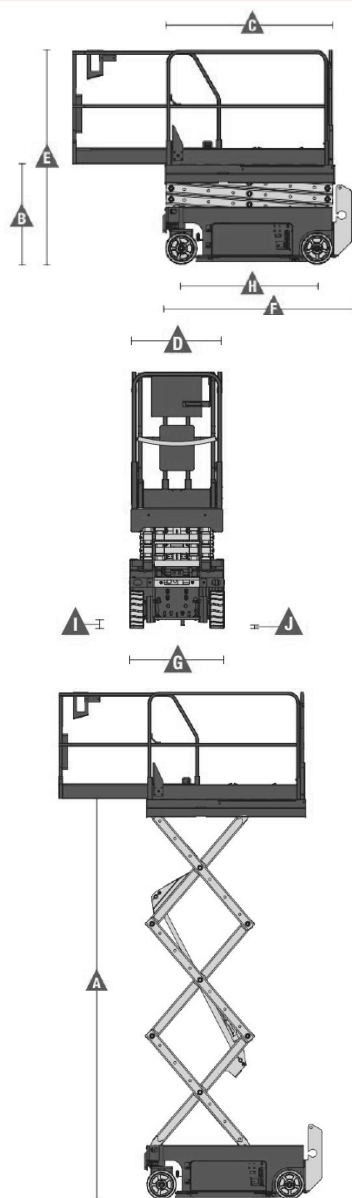

## SPECIFICATIONS

### MEASUREMENTS

Working height max	7.79 m
<b>A</b> Platform height max	5.79 m
<b>B</b> Platform height stowed	1.00 m
<b>C</b> Platform length - outside	1.63 m
extended	2.54 m
<b>D</b> Platform width - outside	74 cm
Guardrail height:	1.10 m
Roll-out platform extension	91 cm
<b>E</b> Height - stowed: fixed rails	2.00 m
rails lowered	1.75 m
folding guardrails	2.11 m
rails folded	1.74 m
<b>F</b> Length - stowed	1.83 m
Length - stowed extended	2.74 m
<b>G</b> Width	76-82 cm (depends on model)
<b>H</b> Wheelbase	1.32 m
<b>I</b> Ground clearance - centre	.06 m
<b>J</b> with pothole guards deployed	.02 m

### PRODUCTIVITY

Lift capacity	227 kg
Drive speed - stowed	4.0 km/h
Drive speed - raised	0.8 km/h
Gradeability	30%
Turning radius - inside	zero
Turning radius - outside	1.55m
Raise / lower speed	16/25 seconds
Drive	dual front wheel
Multiple disc brakes	dual rear wheel
Tyres - solid non-marking	30x11x20 cm

### POWER

Power source	24 V (4 6 V 245 Ah batteries)
--------------	-------------------------------

### WEIGHT

1510 to 1590kg depending on brand and model
---



[www.duralift.com.au](http://www.duralift.com.au)



1300 580 580