



VERTICAL MAST LIFT HERON 10

- ✓ Ideal for soft or uneven ground
- ✓ Ideal for compact / confined spaces
- ✓ Suitable for up and over reach



Working diagram on crawlers

Working diagram on stabilizers

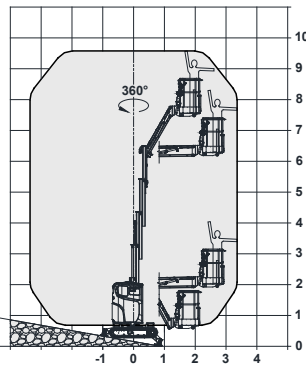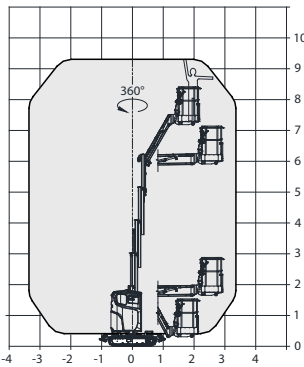

MEASUREMENTS

Working height max	9.6 m
Platform height max	7.6 m
Horizontal outreach max	3.45 m
Max working height at max reach	8.3m
A Wheelbase	1.23 m
B x F Overall stabilization dimensions	2.15 x 1.2 m
C Overall length without basket	2.71 m
D Length	3.25 m
E Height	1.99 m
F Width	1.2 m

PRODUCTIVITY

Lift capacity	230 kg
Max slope	35% (19°)
Max working tilt x/y	5.25% (3°)
Max tilt x/y for autostab	18% (10°)
Speed	2.8 km/h (Lowered) 1.0 km/h (Elevated)
Raise / lower speed	—
Ground pressure in tracks kg/cm ² (kPa)	1.9 (183)
Power cord to platform	Yes
Tracks	Non marking
Charge / Fuel	Battery / Diesel
Drive	4WD
Machine weight	2,750 kg

OTHER

Anti-crush


INDOOR

160 kg
 70 kg
TOT. 230 kg
 Wind max 0 km/h
 Manual Force max. 400N

OUTDOOR


80 kg
 150 kg
TOT. 230 kg
 Wind max 45 km/h
 Manual Force max. 200N

Max. tilt for selfstabilizers

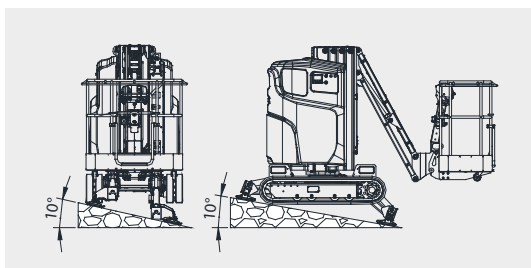

Jib free when machine stowed

Jib free when machine stowed

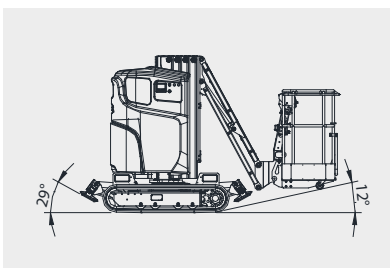

Max. tilt

Max. slope 35%

